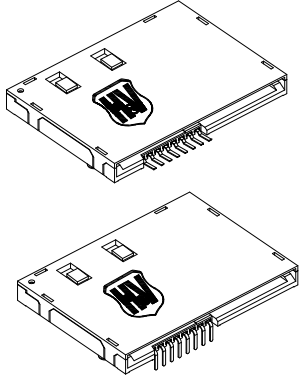
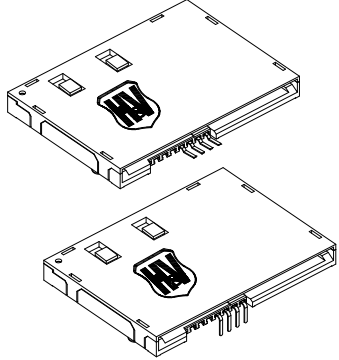
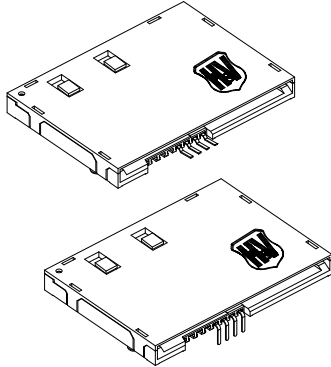
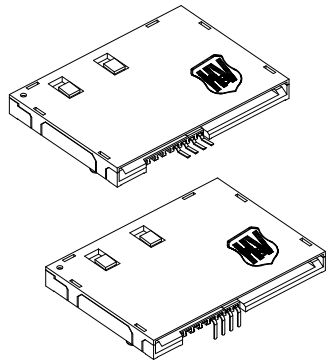
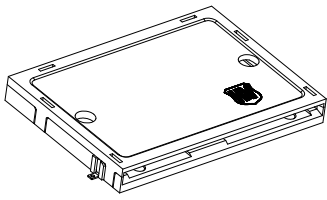
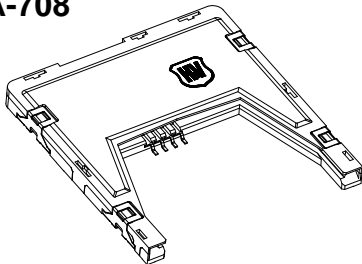
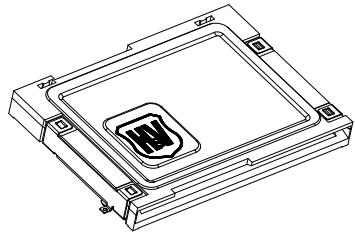


**H&V SMART CARD ACCEPTOR ---- 700 Series (Landing Technology)**

**----- EMV Compliant**

<p><b>ICA-700</b></p>  <ol style="list-style-type: none"> <li>1. 8, 16 pin</li> <li>2. SMT or DIP Type</li> <li>3. Sealed Switch: Normally Open</li> <li>4. Dim.: 55.50L x 40.00W x 5.80H mm</li> <li>5. Durability: 200,000 cycles min.</li> </ol>	<p><b>ICA-702</b></p>  <ol style="list-style-type: none"> <li>1. 8 pin</li> <li>2. SMT or DIP Type</li> <li>3. Blade Switch: Normally Open</li> <li>4. Dim.: 55.50L x 40.00W x 5.80H mm</li> <li>5. Durability: 200,000 cycles min.</li> </ol>	
<p><b>ICA-705</b></p>  <ol style="list-style-type: none"> <li>1. 8 pin</li> <li>2. SMT or DIP Type</li> <li>3. Sealed Switch: Normally Open</li> <li>4. Dim.: 55.50L x 40.00W x 5.80H mm</li> <li>5. Durability: 500,000 cycles min.</li> </ol>	<p><b>ICA-703</b></p>  <ol style="list-style-type: none"> <li>1. 8 pin</li> <li>2. SMT or DIP Type</li> <li>3. Blade Switch: Normally Open</li> <li>4. Dim.: 55.50L x 40.00W x 5.80H mm</li> <li>5. Durability: 500,000 cycles min.</li> </ol>	
<p><b>ICA-706</b></p>  <ol style="list-style-type: none"> <li>1. 8 pin</li> <li>2. SMT Type (with post)</li> <li>3. Sealed Switch: Normally Open</li> <li>4. Dim.: 56.10L x 40.00W x 6.30H mm</li> <li>5. Durability: 500,000 cycles min.</li> <li>6. PCI Compliant</li> </ol>	<p><b>ICA-708</b></p>  <ol style="list-style-type: none"> <li>1. 8 pin</li> <li>2. SMT Type (with post)</li> <li>3. Blade Switch: Normally Open</li> <li>4. Dim.: 59.80L x 55.50W x 5.30H mm</li> <li>5. Durability: 200,000 cycles min.</li> </ol>	<p><b>ICA-709</b></p>  <ol style="list-style-type: none"> <li>1. 8 pin</li> <li>2. SMT Type (with post)</li> <li>3. Sealed Switch: Normally Open</li> <li>4. Dim.: 55.50L x 40.00W x 6.30H mm</li> <li>5. Durability: 500,000 cycles min.</li> <li>6. PCI Compliant</li> </ol>