

TECHNICAL CHARACTERISTICS

1. General Characteristics

Dimension: 27.65L x 18.75W x 2.00H mm
 Weight: Approx. 0.98 g
 Contact principle: Friction technology
 Operating position: Shaft up / Down / Horizontal
 Mounting System: SMT Type (with post)
 Durability: 300,000 cycles min.

2. Mechanical Characteristics

Insulation material: Thermoplastic, UL 94V-0
 RoHS Directive 2011/65/EU Compliant

3. Electrical Characteristics


Number of contacts: 8 pins
 Contact resistance: 100 mΩ max.
 Insulation resistance: >1000 MΩ / 500 VDC
 Switch type: Sealed
 Operation: Normally Open

4. Solderability

Wave: Not applicable
 IR reflow: 260°C, 10 sec. Max.
 Manual soldering: 360°C, 3 sec. Max.

5. Environmental Characteristics


Operating temperature: - 40°C ~ + 85°C
 Operating humidity: 10 % ~ 95 % RH
 Storage temperature: - 40°C ~ + 85°C
 Storage humidity: 10 % ~ 95 % RH

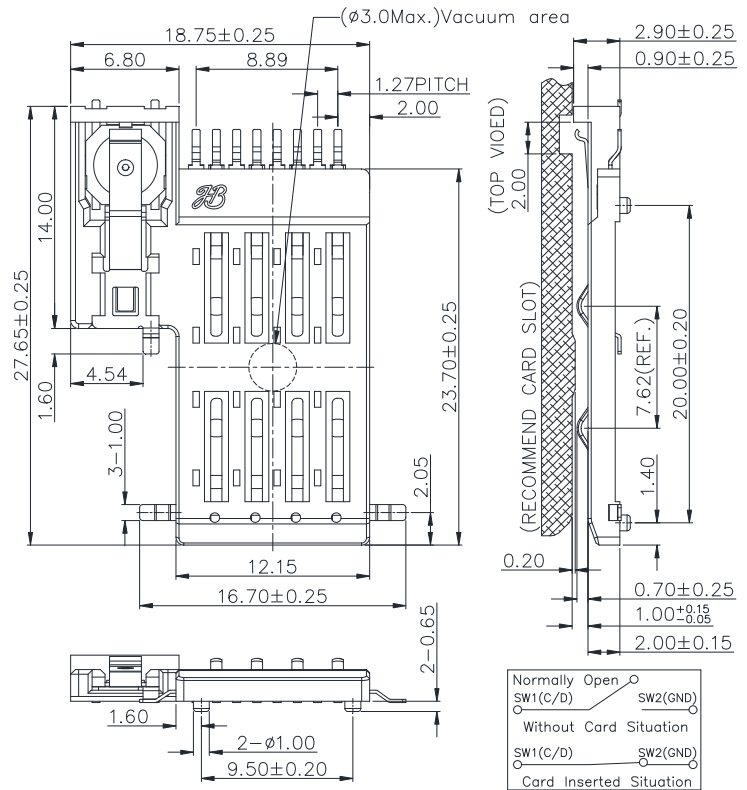

Recommend card slot height: 1.00 +0.15/-0.05 mm

※Metal switch can't be touched. Must keep 0.1 mm min. gap above switch.

Unit: mm; Tolerances: ±0.15 mm
 Mechanical outline dimension

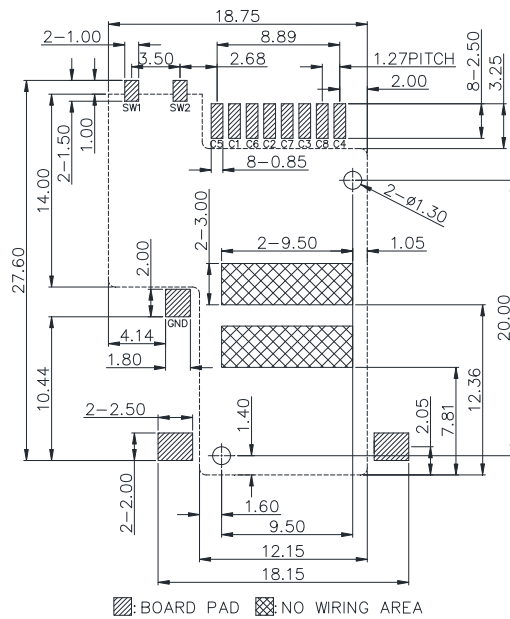

Unit: mm; Tolerances: ±0.05 mm
 Reference dimension for PCB layout

Note:

1. Coplanarity of solder pins 0.10mm max.
2. Recommended thickness of solder paste > 0.15mm.

HB Smart Card Connector

Model No.: ICC-310

Revision: 0.91

Date: JUL. 11, 2019

For further information, please contact:

Tel: +886 2 2662 8882(Rep.) Fax: +886 2 2662 7201-2 E-mail: taipei@hamburg.com.tw URL: <http://www.hamburg.com.tw>